



75x70x20 mm


- * Frame: Plastic (Black) 94V-0
- * Impeller: Plastic (Black) 94V-0
- * Lead Wires: UL type or Equivalent,AWG#28,Red +,Black -
- * Operating Temperature: -25°C~+70°C, 5%~90%RH
- * Storage Temperature: -40°C~+80°C, 5%~90%RH
- * Weight: 65.0g

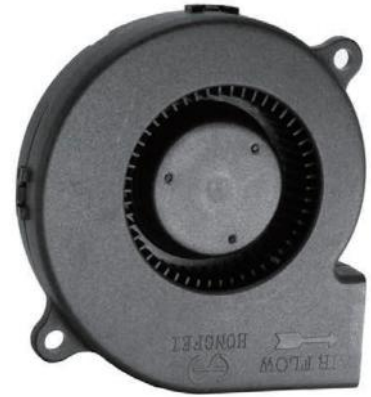

■ P&Q Curve

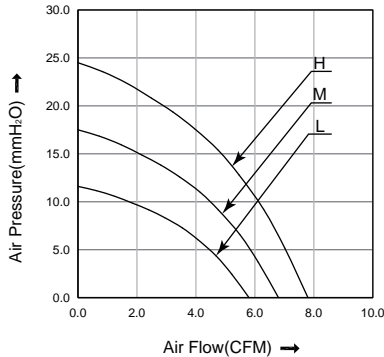

■ Dimensions(Unit:mm)

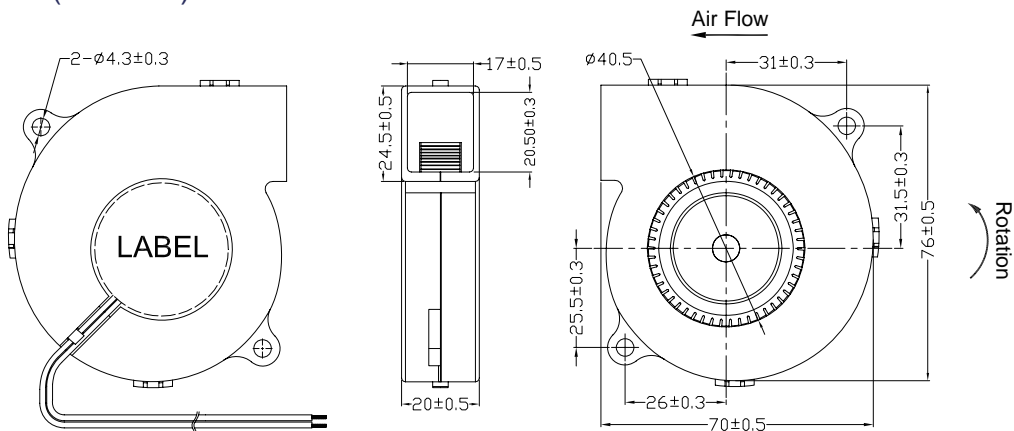

■ Specifications

Model No.	Rated Voltage	Operating Voltage	Rated Current	Speed	Max. Air Flow		Max. Static Pressure		Noise
	VDC	VDC			m ³ /min	CFM	mmH ₂ O	inH ₂ O	
HB7520L05	5	4.0~5.75	0.35	3000	0.16	5.80	11.60	0.46	32.3
HB7520M05	5	4.0~5.75	0.45	3500	0.19	6.80	17.50	0.69	35.3
HB7520L12	12	7.0~13.8	0.18	3000	0.16	5.80	11.60	0.46	32.3
HB7520M12	12	7.0~13.8	0.23	3500	0.19	6.80	17.50	0.69	35.3
HB7520H12	12	7.0~13.8	0.32	4000	0.22	7.80	24.50	0.97	38.2
HB7520L24	24	14.0~27.6	0.09	3000	0.16	5.80	11.60	0.46	32.3
HB7520M24	24	14.0~27.6	0.14	3500	0.19	6.80	17.50	0.69	35.3
HB7520H24	24	14.0~27.6	0.18	4000	0.22	7.80	24.50	0.97	38.2

Note:

Bearing Type: Ball Bearing-----B, Sleeve Bearing-----S, Hydraulic Bearing-----R

Function description:

A:3rd Pulse Wire

F:Techometer / Speed Sensor

R:Alarm/high

Q:Alarm/low S:Alarm/high-low

W:PWM Control input