


HB7530 SERIES

75x75x30 mm


- * Frame: Plastic (Black) 94V-0
- * Impeller: Plastic (Black) 94V-0
- * Lead Wires: UL type or Equivalent,AWG#28,Red +,Black -
- * Operating Temperature: -25°C~+70°C, 5%~90%RH
- * Storage Temperature: -40°C~+80°C, 5%~90%RH
- * Weight: 94.0g



■ P&Q Curve

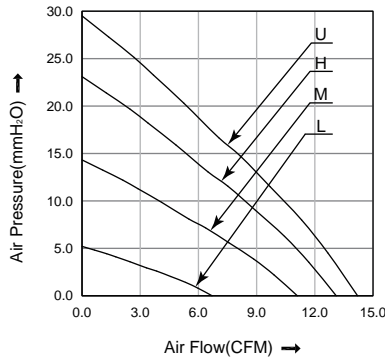

■ Dimensions(Unit:mm)

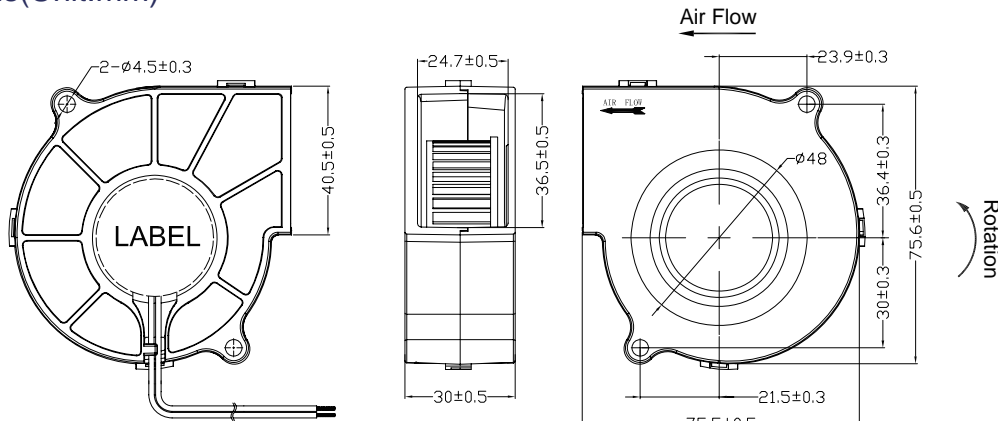

■ Specifications

Model No.	Rated Voltage	Operating Voltage	Rated Current	Speed	Max. Air Flow		Max. Static Pressure		Noise
	VDC	VDC	A	RPM	m ³ /min	CFM	mmH ₂ O	inH ₂ O	dB
HB7530L05	5	4.0~5.75	0.30	2000	0.19	6.70	5.20	0.20	24.2
HB7530M05	5	4.0~5.75	0.40	3000	0.31	11.10	14.30	0.56	34.3
HB7530H05	5	4.0~5.75	0.60	3800	0.37	13.10	23.10	0.91	42.7
HB7530L12	12	7.0~13.8	0.14	2000	0.19	6.70	5.20	0.20	24.2
HB7530M12	12	7.0~13.8	0.21	3000	0.31	11.10	14.30	0.56	34.3
HB7530H12	12	7.0~13.8	0.40	3800	0.37	13.10	23.10	0.91	42.7
HB7530U12	12	7.0~13.8	0.60	4500	0.40	14.20	29.50	1.16	45.5
HB7530L24	24	14.0~27.6	0.09	2000	0.19	6.70	5.20	0.20	24.2
HB7530M24	24	14.0~27.6	0.14	3000	0.31	11.10	14.30	0.56	34.3
HB7530H24	24	14.0~27.6	0.20	3800	0.37	13.10	23.10	0.91	42.7
HB7530U24	24	14.0~27.6	0.30	4500	0.40	14.20	29.50	1.16	45.5
HB7530L48	48	28.0~56.0	0.06	2000	0.19	6.70	5.20	0.20	24.2
HB7530M48	48	28.0~56.0	0.09	3000	0.31	11.10	14.30	0.56	34.3
HB7530H48	48	28.0~56.0	0.13	3800	0.37	13.10	23.10	0.91	42.7
HB7530U48	48	28.0~56.0	0.18	4500	0.40	14.20	29.50	1.16	45.5

Note:

Bearing Type: Ball Bearing-----B, Sleeve Bearing-----S, Hydraulic Bearing-----R

Function description:

A:3rd Pulse Wire F:Techometer / Speed Sensor R:Alarm/high
 Q:Alarm/low S:Alarm/high-low W:PWM Control input