



HD20060 SERIES

200x200x60 mm


- * Frame: Plastic (Black) 94V-0
- * Impeller: Plastic (Black) 94V-0
- * Lead Wires: UL type or Equivalent, AWG#28, Red +, Black -
- * Operating Temperature: -25°C~+70°C, 5%~90%RH
- * Storage Temperature: -40°C~+80°C, 5%~90%RH
- * Weight: 1060g

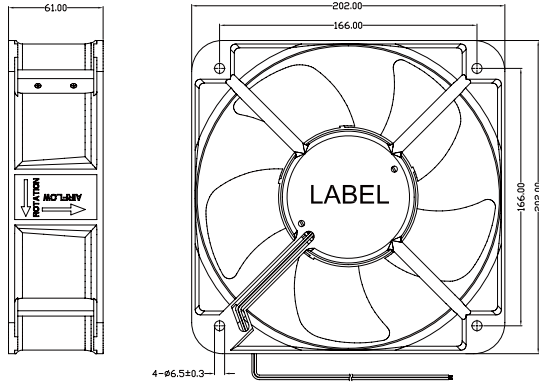

■ Mounting panel cutout(Unit:mm)

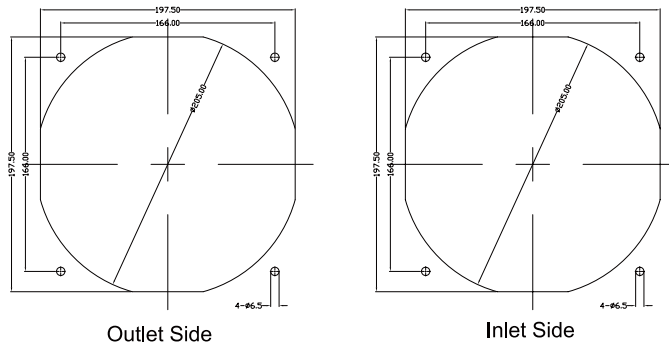

■ P&Q Curve

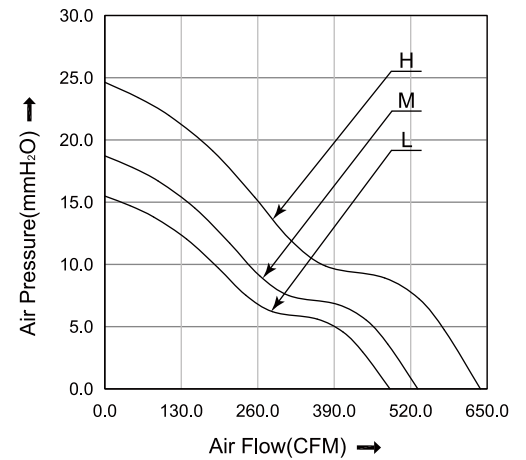

Model No.	Rated Voltage	Operating Voltage	Rated Current	Speed	Max. Air Flow		Max. Static Pressure		Noise
	VDC	VDC	A	RPM	m ³ /min	CFM	mmH ₂ O	inH ₂ O	dB
HD20060L12	12	7.0~13.8	2.00	2000	13.82	488.00	15.30	0.60	50.0
HD20060M12	12	7.0~13.8	2.50	2500	15.09	533.00	18.80	0.74	58.0
HD20060H12	12	7.0~13.8	3.50	3000	18.01	636.00	24.40	0.96	68.0
HD20060L24	24	14.0~27.6	1.00	2000	13.82	488.00	15.30	0.60	50.0
HD20060M24	24	14.0~27.6	1.50	2500	15.09	533.00	18.80	0.74	58.0
HD20060H24	24	14.0~27.6	2.50	3000	18.01	636.00	24.40	0.96	68.0
HD20060L48	48	28.0~56.0	0.50	2000	13.82	488.00	15.30	0.60	50.0
HD20060M48	48	28.0~56.0	0.80	2500	15.09	533.00	18.80	0.74	58.0
HD20060H48	48	28.0~56.0	1.20	3000	18.01	636.00	24.40	0.96	68.0

Note:

Bearing Type: Ball Bearing-----B, Sleeve Bearing-----S, Hydraulic Bearing-----R

Function description:

A:3rd Pulse Wire F:Techometer / Speed Sensor R:Alarm/high
 Q:Alarm/low S:Alarm/high-low W:PWM Control input