


92x92x25 mm


- * Frame: Plastic (Black) 94V-0
- * Impeller: Plastic (Black) 94V-0
- * Lead Wires: UL type or Equivalent, AWG#28, Red +, Black -
- * Operating Temperature: -25°C~+70°C, 5%~90%RH
- * Storage Temperature: -40°C~+80°C, 5%~90%RH
- * Weight: 90.0g



■ Dimensions(Unit:mm)

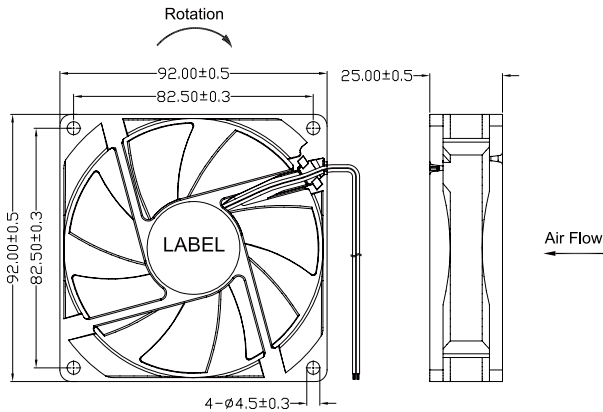

■ Mounting panel cutout(Unit:mm)

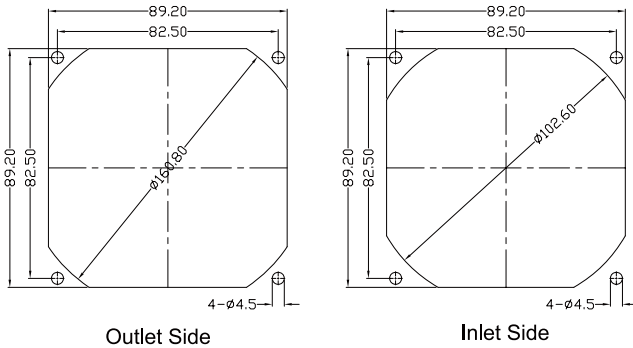

■ Specifications

Model No.	Rated Voltage	Operating Voltage	Rated Current	Speed	Max. Air Flow		Max. Static Pressure		Noise
	VDC	VDC	A	RPM	m ³ /min	CFM	mmH ₂ O	inH ₂ O	dB
HD9225L12	12	7.0~13.8	0.18	2000	1.14	40.10	1.90	0.07	26.5
HD9225M12	12	7.0~13.8	0.23	2500	1.42	50.30	3.00	0.12	32.5
HD9225H12	12	7.0~13.8	0.35	3200	1.82	64.20	4.90	0.19	38.5
HD9225U12	12	7.0~13.8	0.50	3800	2.15	76.10	7.20	0.28	45.0
HD9225L24	24	14.0~27.6	0.09	2000	1.14	40.10	1.90	0.07	26.5
HD9225M24	24	14.0~27.6	0.13	2500	1.42	50.30	3.00	0.12	32.5
HD9225H24	24	14.0~27.6	0.18	3200	1.82	64.20	4.90	0.19	38.5
HD9225U24	24	14.0~27.6	0.32	3800	2.15	76.10	7.20	0.28	45.0
HD9225L48	48	28.0~56.0	0.06	2000	1.14	40.10	1.90	0.07	26.5
HD9225M48	48	28.0~56.0	0.09	2500	1.42	50.30	3.00	0.12	32.5
HD9225H48	48	28.0~56.0	0.13	3200	1.82	64.20	4.90	0.19	38.5
HD9225U48	48	28.0~56.0	0.18	3800	2.15	76.10	7.20	0.28	45.0

Note:

Bearing Type: Ball Bearing-----B, Sleeve Bearing-----S, Hydraulic Bearing-----R

Function description:

A:3rd Pulse Wire F:Techometer / Speed Sensor R:Alarm/high
 Q:Alarm/low S:Alarm/high-low W:PWM Control input

■ P&Q Curve

